
Document # PG10 - 003 Revised 08/20/09 Page 1/2




30 Inch Wide Dishwashers



All tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated.




PRODUCT DIMENSIONS - SIDE VIEW - DOOR OPEN




PRODUCT DIMENSIONS -FRONT VIEW

Model	Electrical Circuit Requirements	Water Pressure	Water Temperature	Approximate Shipping Weight
ED30	15 Amp, 120 Vac, 60 Hz dedicated, grounded, three prong power outlet. See model number label on product for total connected loaded.	20 to 120 psi (138 - 827 kPa)	120 °F, minimum	215 lbs.
ID30				218 lbs.

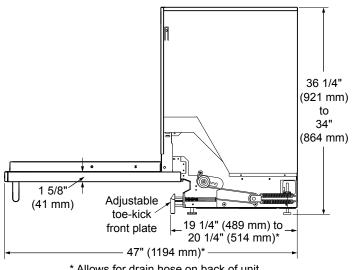

* Allows for drain hose on back of unit

SIDE VIEW - DOOR OPEN



CUT-OUT FRONT VIEW

⚠ WARNING

- Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- This appliance must be installed in accordance with the accompanying installation instructions.


Document # PG10 - 003 Revised 08/20/09 Page 2/2



30 Inch Wide Dishwashers


PLANNING GUIDE

All tolerances: +1/16", -0, (+1.6 mm, -0) unless otherwise stated



CUSTOM PANEL INSTALLATION (ID30 ONLY)


For proper door spring operation, the maximum door panel weight, including hardware, is 16 lbs. (7.3 kg).

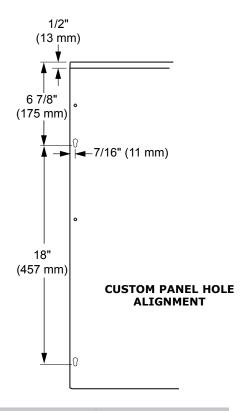

Model	Width	Maximum Height	Maximum Thickness
ID30	29 7/8" (760 mm)	30" (762 mm)*	3/4" (19 mm)

CUSTOM PANEL OVERALL DIMENSIONS (ID MODEL ONLY)

*Without installation of a custom toe kick, see template included with product for further details.

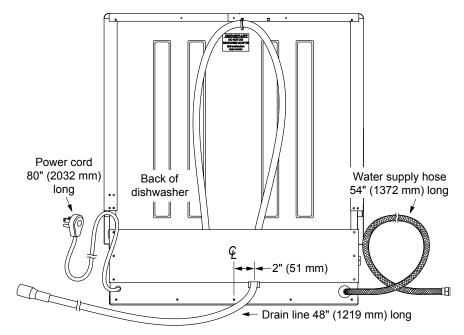

UTILITY CONNECTIONS

www.Dacor.com Phone: (800) 793-0093 Specifications are subject to change without notice. See installation instructions for additional details.